

## Product Data Sheet

### PHYSICAL PROPERTIES:

#### Tolerances:

Length +/- 6mm, Width +/- 6mm,  
Thickness +/- 6mm

**Finish:** Smooth Concrete

#### Concrete strength:

Typical 28 day compressive  
strength = 55N/mm<sup>2</sup>

#### Density:

Typically 2500kg/m<sup>3</sup>

#### Concrete Design:

DC2 to BS8500 air entrained

Colour:

Light Grey

**Carbon footprint:** 49.8kg co<sub>2</sub> per unit

### DESIGN:

\*Bespoke Quadrants

\*Site specific requirements


\*Full design takeoff service with 3D  
drawings

\*Easy install

\*Metre long kerbs for faster and efficient  
installation

\*Urban and residential locations

### Profile

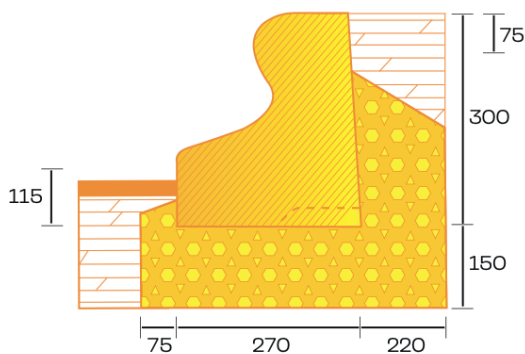

BS7263 (1994) Complies with all the relevant  
specifications Transverse strength specification  
exceeded by 70%

### QUALITY

\*Wet cast production

\*Stainless steel moulds providing the highest  
quality finish and robust performance

\*Manufactured in accordance to BS8110 &  
BS723

\*70% Stronger than conventional pressed  
kerbs



**Sales Office &  
Precast Works:**  
Hoyle Mill Road  
Kinsley  
Pontefract  
West Yorkshire  
WF9 5JB

**Tel:** 01977 618994  
**Fax:** 01977 616150  
**Email:** info@camelprecast.co.uk