

# Oversail blocks – Standard



## Product Data Sheet

### PHYSICAL PROPERTIES:

#### Tolerances:

Length +/- 6mm, Width +/- 6mm,  
Thickness +/- 6mm

**Finish:** Smooth Concrete

#### Concrete strength:

Typical 28 day compressive  
strength = 55N/mm<sup>2</sup>

#### Density:

Typically 2500kg/m<sup>3</sup>

#### Concrete Design:

DC2 to BS8500 air entrained

Colour:

Light Grey

**Carbon Footprint** - 18kg co<sub>2</sub> per unit.

### QUALITY

\*Wet cast production

\*Manufactured using 55NM/mm<sup>2</sup> concrete

\*Cast in lifting anchors provide safe and easier installation

\*Supplied on pallets for ease of handling on site

### DESIGN:

\*Manufactured in accordance with BSEN1339  
and to Great British Railway Standards


\*Meets NR/L3/CIV/030

\*Cast in lifting anchors

\*RISQS approved supplier

\*Bespoke Design services available to suit all  
applications

**Safety first**  
**Cast in lifting anchors**

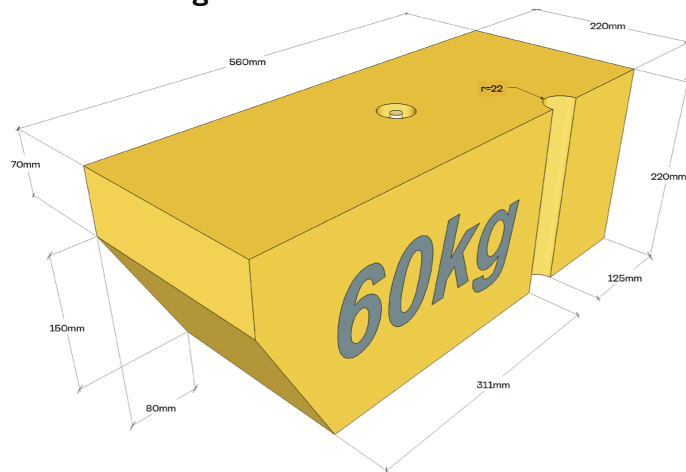

**Sales Office &  
Precast Works:**  
Hoyle Mill Road  
Kinsley  
Pontefract  
West Yorkshire  
WF9 5JB

**Tel:** 01977 618994  
**Fax:** 01977 616150  
**Email:** info@camelprecast.co.uk